

ActivePure™

Wellness Begins with the Air You Breathe™



Features ActivePure® Technology, proven to reduce up to 99.9% of many common types of bacteria, viruses, and mold¹

THE TECHNOLOGY

The ActivePure® Guardian Cloud provides ActivePure Technology in the form of a 2'x2' ceiling tile for situations when a portable unit cannot fit in the room. Patented ActivePure Technology is an advanced air and surface purification technology. It has been proven to reduce up to 99.9% of many common airborne and surface contaminants (list of tested pathogens can be found in “The Proof” section below).

ActivePure Technology does not replace the need to follow public health guidelines and should be used as complementary technology.

THE PROOF


In extensive unaffiliated lab testing, ActivePure® Technology has been proven to significantly reduce the following contaminants and pathogens:

- SARS-CoV-2
- *Listeria monocytogenes*
- *Staphylococcus aureus*
- Murine Norovirus
- *Aspergillus niger endospores*
- *E. coli*
- H1N1 Influenza
- *Candida auris*
- H5N8 Influenza
- *Botrytis cinerea*
- MRSA
- *Sclerotinia sclerotiorum*
- *Bacillus globigii*
- *Legionella pneumophila*
- MS2 Bacteriophage
- *Aspergillus versicolor*
- *Staphylococcus epidermidis*
- *Clostridium difficile*
- PhiX-174
- *Salmonella enterica*
- *Erwinia herbicola*

THE BENEFITS

The ActivePure Guardian Cloud provides 24/7 air purification and surface decontamination in indoor spaces up to 2,000 sq. ft.. It is a proactive and effective solution for your home or business.

- Uses patented ActivePure® Technology, proven to reduce up to 99.9% of many common types of bacteria, viruses, and mold in indoor air and surfaces¹
- Reduces VOC gases, smoke, and odors without the use of ozone¹
- Discreet and easy installation

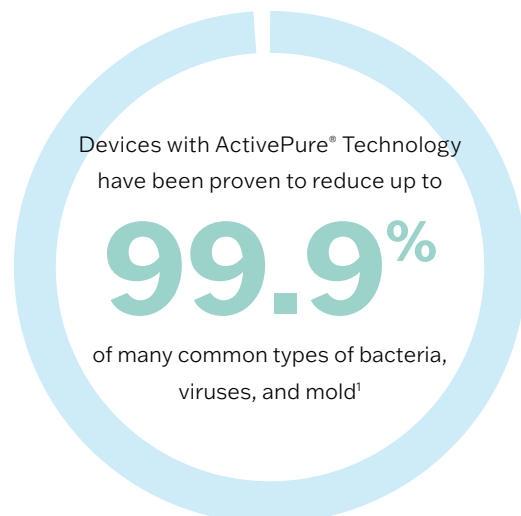

¹View test results at ActivePure.com/Scientific-Proof

ActivePure®

GUARDIAN CLOUD



Product Information	00770 (120V) Model: A1121B (ozone free) Meets California ozone emissions limit. CARB Certified. Validated to UL 2998
Technology Included	ActivePure® Technology – (1) 14” Cell
Electrical	110–120V 60Hz .75A (90W)
Mechanical	100 CFM (Fan) 2.83 m ³ /min Motor: Impedance-Protected, 26 watts, safety power switch
Safety	Conforms to UL 867
Operating Temperature	34° F – 200° F (1.1° C – 93° C)
Weight & Dimensions	12 lbs (5.44 kg) 24” H x 24” W x 5” D (60.96 cm H x 60.96 cm W x 12.7 cm D)
Recommended Maximum Coverage in a Contiguous Space¹	Up to 2,000 sq. ft. (185 m ²) depending on occupant density and other factors. High density commercial not to exceed 1,000 sq. ft. (92 m ²). For coverage in medical or health care environments, contact Medical@activepure.com .
Warranty	Limited 3 year warranty

1. Recommended ceiling height to not exceed 10 ft. Solutions should be customized based upon a variety of factors including HVAC system capabilities, HVAC settings, air flows (taking into account walls, air pressure, and doors), ambient air temperature, humidity, variable density, known VOC concentrations, and other layers of protection.



Let us show you more!

ActivePure Technology is available in HVAC, induct units and portable, plug-and-play units.



ActivePure.com